



vacompact

vacuum-packed waste-processing

**vacompact toplayer up to 90 liter and
vacompact frontloader up to 40 liter waste**


New equipment for sailing and motor yachts!

**Vacompact convinces with airtight and odor-free
waste packaging by vacuum process.**

- reduction of waste-volume by up to 50%
- hygienic disinfection in tearproof trash bags
- flexible waste-storage in any available areas
- independent of extra-cooled waste storage
- user-friendly vacuum operation in 2 minutes
- cost-saving when disposal ashore is calculated by volume
- energy saving by only 0,025 KW per 90 liters of waste
- environment friendly and antibacterial
- small and compact dimensions

Save your environment!

Daily tons of garbage are disposed of in our seas worldwide. The hygienic waste packaging with vacompact provides a pleasant climate on board while supporting the responsible conservation of nature.

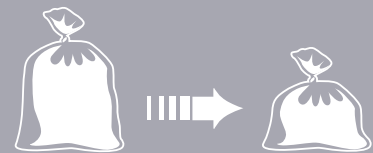

Volume reduction up to 50%

Applications vacompact

- kitchen waste
- food waste
- cleaning cloth
- work clothes
- sanitary waste
- oil-stained rags

KURATA AG

KURATA AG
STADTBACHSTR. 63
CH-5400 BADEN

PHONE: +41 - 56 - 511 23 82
E-MAIL: info@kurata-consulting.com
www.vacompact.com



Waste packaging for sailing and motor-yachts

Innovative – volume reduced – odorless – save - antibacterial

Easy handling and fast procedure:

1. The waste is filled in the vaccompact PET- garbage bags. These bags are made of highly tear-resistant thermoplastic.
2. The device lid is opened and the garbage bag is placed into the vacuum chamber.
3. The upper open end of the bag is clamped between two fixing brackets.
4. After closing the lid and pressing the Start icon on the touch-screen, the system-controlled vacuum process sets in.
5. While the air-extraction, a disinfectant is injected into the chamber at the same time. This self-cleaning process affects a germ-reducing effect.
6. Now the waste bag is sealed.
7. For eliminating germs on the outside of the bag once again disinfectant is sprayed.
8. Subsequently the chamber is flooded with atmospheric pressure. The air purification is carried via an activated carbon filter.
9. After 2 minutes, the vacuum-packaging is finalized. The lid opens automatically.
10. The waste bag is volume-reduced up to 50%, airtight, odor free and can be removed.

The vacuum packed bags can be stored anywhere for a long time. Even outdoors, germ-reduced and without odors. Waste storage in extra cooled rooms is no longer necessary.

Security: The vaccompact key switch protects against unauthorized use and misuse.

All HACCP criteria and requirements are met (Hazard Analysis Critical Control Points).

Technical details

Material	VA-steel
Waste volume reduction	up to 50%
Connected load	230 V – 50 Hz – 1KW
Security	EN 60204 – VDE 0113
Noise emission	62 dB
Control	SPS
Safety category	IP 54

vaccompact top 90

Dimensions	
Waste volume per vacuum process	90 liter
Weight	144 Kg
Width	886 mm
Height	780 mm
Depth	735 mm

vaccompact front 40, integrable

Dimensions	
Waste volume per vacuum process	40 liter
Weight	65 Kg
Width	560 mm
Height	720 mm
Depth	490 mm